


Gran Mal - Shock Setup Guide

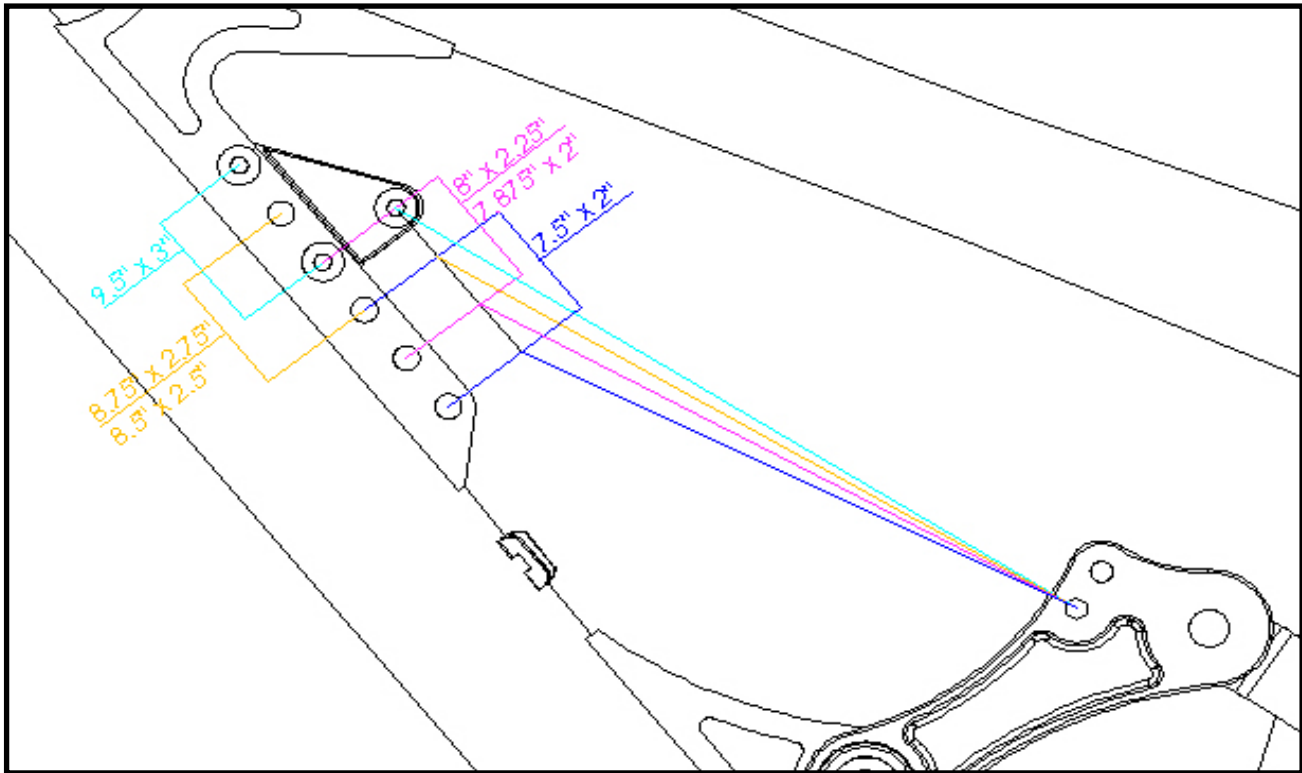

Shock	Chainstay / Seatstay Positioning		
	Front Hole	Middle Hole	Rear Hole
9.5" x 3"			
Rocker-Arm Bottom Hole (Long Travel)	8.7"	8.2"	7.8"
Rocker-Arm Top Hole (Short Travel)	7.3"	7.0"	6.6"
Geometry			
Head Angle	66.0°	64.8°	63.6°
Seat Angle	74.0°	72.8°	71.6°
BB Height	15.4"	14.8"	14.2"

Setting usable with 2.5 low knob tires only.

Setting Not usable with this shock configuration

Shock	Chainstay / Seatstay Positioning		
	Front Hole	Middle Hole	Rear Hole
8.75" x 2.75"			
Rocker-Arm Bottom Hole (Long Travel)	7.7"	7.4"	7.1"
Rocker-Arm Top Hole (Short Travel)	6.7"	6.4"	6.1"
Geometry			
Head Angle	66.0°	64.8°	63.6°
Seat Angle	74.0°	72.8°	71.6°
BB Height	15.4"	14.8"	14.2"

Shock	Chainstay / Seatstay Positioning		
	Front Hole	Middle Hole	Rear Hole
8.5" x 2.5"			
Rocker-Arm Bottom Hole (Long Travel)	7.0"	6.7"	6.4"
Rocker-Arm Top Hole (Short Travel)	6.0"	5.7"	5.4"
Geometry			
Head Angle	65.2°	64.0°	62.8°
Seat Angle	73.2°	72.0°	70.8°
BB Height	15"	14.4"	13.8"

Shock	Chainstay / Seatstay Positioning		
	Front Hole	Middle Hole	Rear Hole
8" x 2.25"			
Rocker-Arm Bottom Hole (Long Travel)	6.3"	6.0"	5.7"
Rocker-Arm Top Hole (Short Travel)	5.6"	5.3"	5.0"
Geometry			
Head Angle	66.0°	64.8°	63.6°
Seat Angle	74.0°	72.8°	71.6°
BB Height	15.4"	14.8"	14.2"

Shock	Chainstay / Seatstay Positioning		
	Front Hole	Middle Hole	Rear Hole
7.875" x 2"			
Rocker-Arm Bottom Hole (Long Travel)	5.6"	5.3"	5.0"
Rocker-Arm Top Hole (Short Travel)	5.0"	4.7"	4.6"
Geometry			
Head Angle	66.0°	64.8°	63.6°
Seat Angle	74.0°	72.8°	71.6°
BB Height	15.4"	14.8"	14.2"

Shock	Chainstay / Seatstay Positioning		
	Front Hole	Middle Hole	Rear Hole
7.5" x 2"			
Rocker-Arm Bottom Hole (Long Travel)	5.6"	5.3"	5.0"
Rocker-Arm Top Hole (Short Travel)	5.0"	4.7"	4.6"
Geometry			
Head Angle	66.8°	65.4°	64.2°
Seat Angle	74.8°	73.4°	72.2°
BB Height	15.6"	15.0"	14.4"